

Images may include options.

Automatic Two-Needle Hemmer

Sleeves and Bottoms

An electronically controlled workstation consisting of a conveyORIZED downturn hemming apparatus with two-or-three needle bottom and/or top coverstitch sewing head, electronic motor, automatic edge trim and cut apart, and self-contained waste disposal.

Sleeves • Bottoms


- Patented Serial Bus Control System
- DC electronic motor & controls
- Reliable edge trimmer
- Fold-in-half & stack or stack only
- Stacker & return conveyor for bottom hemming available
- Optional imitation cuff attachment (patented)

OPERATION


The operator places parts to an edge guide and initiates sewing. The unit will continue sewing as long as parts are placed on the conveyor within a specific distance. The sew cycle will stop if the operator fails to position the next part.

OPTIONS

- **2211-EG3** - Edge guiding system
- **2211PKIT01** - Pocket loading station
- **211-KIT01** - Thread handling
- **311-006B** - Fold in half stacker
- **311-5A** - Top cover 3 needles



Footprint

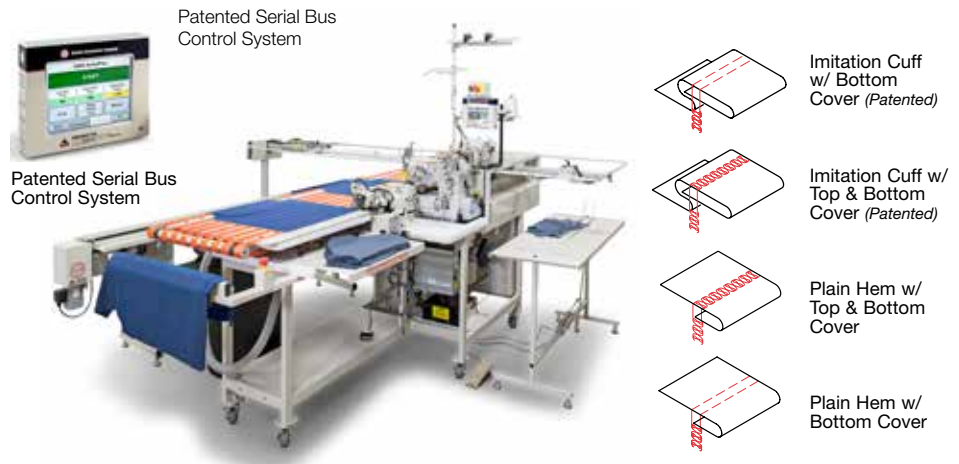

SPECIFICATIONS	
Voltage (v/ph/hz)	220v 1ph
Current (amps)	5
Air pressure (psi)	90
Air consumption (cfm)	21
Shipping weight (lbs)	1700
Shipping dimensions (w/l/h, inch)	132 x 72 x 65
PRODUCTION	
Sleeves per hour	1950
Bottoms per hour	1245

Depending on material and size of parts

www.atlatt.com • sales@atlatt.com

PATENTS: Our equipment may be covered by one or more patents. Please go to the following web page for an up-to-date patent list: www.atlatt.com/patents.php © 2018 Atlanta Attachment Co. 17168042718

362 Industrial Park Drive
Lawrenceville, GA 30046 USA
+1 (770) 963-7369 • FAX +1 (770) 963-7641



Atlanta Attachment Company
The Company that
Sudden Service
built